


Premium Series 30 | VS/30 | VSJ Single Tilt Slider



Windows for Life™



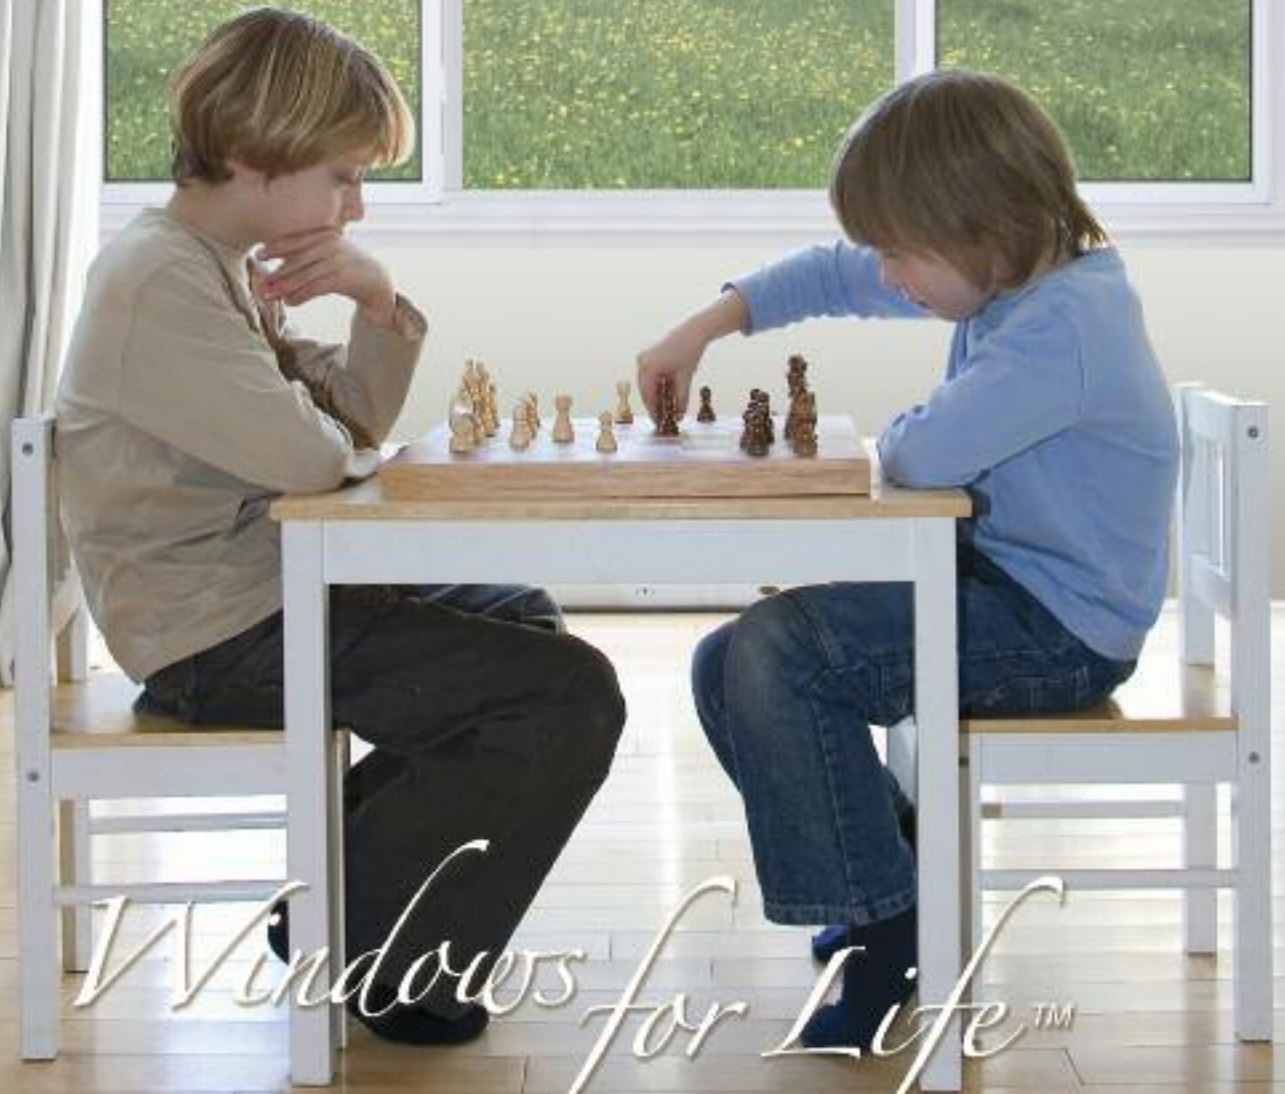

"You'll appreciate the quality we build into every window!"




frame **THE VINYL COMPANY**
QUALITY EXTRUDERS SINCE 1998

glass Stainless **The TempSmart™ Spacer System** **IGMA** INSULATING GLASS MANUFACTURER ALLIANCE

VERSATILE & FLEXIBLE

For new homes, these windows are built to your individual needs with optional nailing fin and brick mould, with jamb returns and frame extensions to fit your type of wall construction.

- **Fusion Welded Frame & Sash**
Welding creates a fully sealed, continuous profile that eliminates potential air and water penetration through frame and sash corners.
- **Maintenance Free Solid uPVC Vinyl Profiles**
The multi-chambered design provides structural strength as well as insulating air pockets which reduce heat and cold transfer.
- **Lift Rail**
Permits single sash to be operated with ease.
- **Built-in Water Management Systems**
Carefully engineered independent drain allowing for quick water management to the exterior.
- **Integral J Fin**
Ideal for siding applications, offering cleaner details and improved performance (301SJ only).

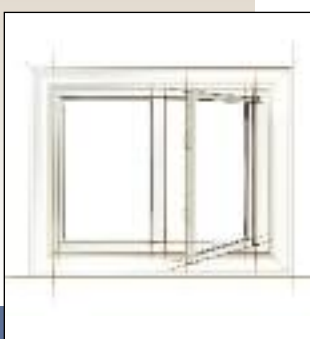

Window Ratings
CCSA A440 - M98 - A3/Fixed, B2, C3, F10, S2
Energy Star Rating: +31* • U value: 0.28*
CSA Certified • NFRC Certified
ENERGY STAR Qualified • Window Wise Certified

Single Tilt Slider
Style 301VS/301VJS

Width: Min 18" Max 72"
Height: Min 12" Max 50"

NOTE: If Height is between 12" and 13", width can be no less than 22"

Maximum size with Triple Glass or Keepsafe is 18 sq. ft.

* Tested with Low E, Argon Gas and a warm edge spacer * Ask your dealer for more information

Double End Vent
Style 301VSEV/301VSEVJ

Width: Min 42" Max 120"
Height: Min 12" Max 50"

Widths less than 56" must be 1/3, 1/3, 1/3
Widths over 108" must be 1/4, 1/2, 1/4

hardware **TRUTH HARDWARE**

- **Double Bond Glazing System**
Flexible dual durometer seals hug the glass from both sides. The system also includes a glazing tape applied to the interior side. The result is an unprecedented barrier against air and water penetration.
- **Commercial Glazing Technique**
Exterior glass stops, combined with the Double Bond Glazing, are more effective in maintaining a well-sealed window.
- **High Performance Glass Options**
Choose Solar Gain Low E for free solar heat or Solar Shield Low E for reducing solar heat gain. Argon and Krypton Gas fillings will maximize heat savings! Ask how E-Clean Glass uses the energy of the sun to reduce dirt on your glass!
- **Warm Edge Spacer Technology**
Only the best warm edge spacers will reduce perimeter condensation on an insulating glass unit, fight mold and increase the comfort of your home.
- **7/8" Overall Insulating Glass**
Results in superior thermal performance. Our optional high performance triple glass has two 1/4" air spaces. With Krypton Gas and double Solar Shield Low E, this results in a R8.2 (.12U) center glass value.
- **IGMA Approved**
Certification Numbers - Stainless #2521-P, TempSmart™ #2190-0200508G
- **Double Neoprene Bulbs**
Compression style seals close tight where the sash meets the frame and sliding is not required. Our engineers insisted that you get this premium component!
- **Quick Lock Shoes**
When you tilt your sash for cleaning, a secure locking action from multi-directional shoe expansion break-points secures the sash in place.
- **Triple Seal**
Three layers of premium Fin Seal stop air and water as they reduce sound transmission. Benefit from the best sliding seals available!
- **Recessed Tilt Latches**
Your operating sash tilts in for easy cleaning from inside your home. Our recessed design maintains a clean and attractive sight line in your window.
- **Cam Locks**
Heavy duty 180 degree locking cams pull your operating sash and frame tightly together for a great seal!
- **Hinged Drain Covers**
Designed to keep bugs out while allowing water to flow to the outside.



Wide Selection of Styles and Configurations



Optional Internal grills for beauty and distinction.

As we are constantly improving our products, specifications may have changed from those herein. Please contact VWD regarding up-to-date specifications.

Authorized Distributor

NRC-CRC



vinylwindowdesigns.com